


# SPOTTER MD

SPOTTING SCOPE

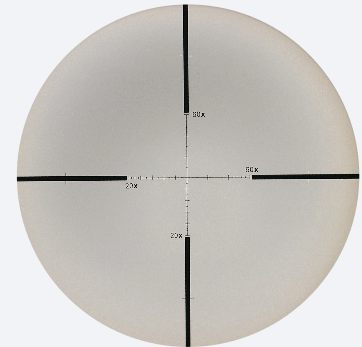

Display

The SPOTTER MD spotting scope features a Mil-Dot ranging reticle and 20-60x80 optics to bring your target into clear, consistently-sharp, high-contrast focus, especially at the kind of distances that overwhelm lesser optics. The SPOTTER MD is nitrogen-filled, waterproof, dustproof, and shock-resistant. All Newcon Optik SPOTTER series spotting scopes come standard with a durable, padded field carrying case and tripod.

Optics	SPOTTER MD
Minimum magnification (x)	20
Maximum magnification (x)	60
Objective lens diameter (mm)	80
Focus range (m)	15 - ∞
Exit pupil (mm)	4 - 1.3
Eye relief, (mm)	18 - 15
Field of view @ 1,000y 20x / 60x (feet)	89 / 44
Dioptre adjustment range	±7
Twilight factor (20x / 60x)	16 / 1.7
Relative brightness (20x / 60x)	40 / 69.3
Reticle type	Mil-Dot
Mechanics, Electronics & Environmental	
Weight (g)	1,180
Dimensions (mm)	440x110x93
Eye piece type	Straight
Digital camera compatible	✓
Operating temperature range (°C)	-30 - to +60
Storage temperature range (°C)	-30 - to +60
Humidity (%)	90
Nitrogen purged	✓
Waterproofing	IP67

# SPOTTER MD

SPOTTING SCOPE



## DELIVERY SET

Supplied with the following standard accessories:

- Soft carrying case
- Tripod
- Objective and eyepiece lens cover
- Lens cleaning cloth
- Operation manual

## OPTIONAL ACCESSORIES



SDCA



NVS Coupler



Hard Case



Standard Delivery Set